

CHRIST CHURCH COMPLEX




CHRIST CHURCH
COMPLEX SOHE 2008



CHRIST CHURCH
COMPLEX SOHE 2008



1 christ church complex
church square st kilda west
front of church

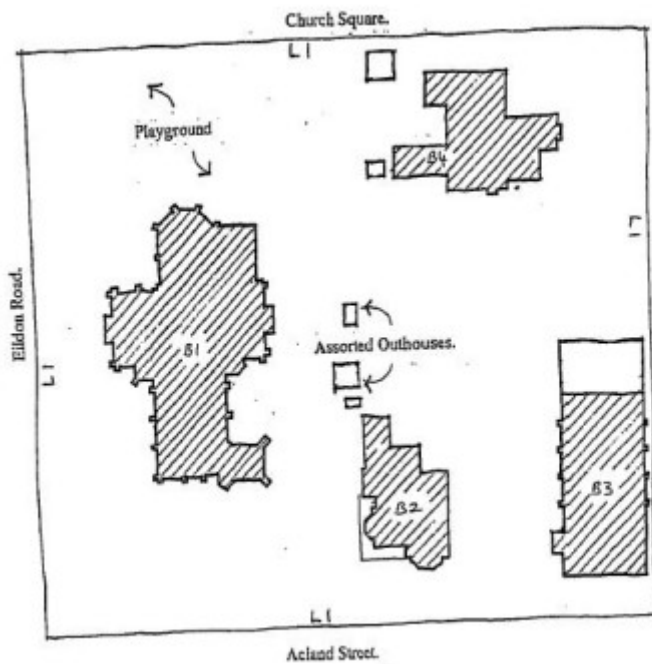

h00996 plan h0996

Location

14 ACLAND STREET AND 1 ST LEONARDS AVENUE ST KILDA, PORT PHILLIP CITY

Municipality

PORT PHILLIP CITY

Level of significance

Registered

Victorian Heritage Register (VHR) Number

H0996

Heritage Overlay Numbers

HO9

VHR Registration

December 9, 1993

Heritage Listing

Victorian Heritage Register

Statement of Significance

Last updated on - October 31, 1997

The Christ Church complex, St Kilda comprises four main buildings: the church, bishop's residence, vicarage and parish hall. Christ church was constructed in 1854-57 to the designs of Purchas & Swyer and enlarged in 1874 and 1881 to the designs of Sydney W Smith. The bishop's residence was built in the 1850s as the original vicarage. In 1884 the present vicarage was constructed and the original building was used for church related activities until becoming the Bishop's residence in 1987. The parish hall, designed by Richardson and Wood Architects, was built by FJ Fair in 1914.

Christ Church, the bishop's residence, the vicarage and the parish hall are located on land granted to the Church of England in 1855 and named Church Square, a rare and significant square in the history of town planning in Victoria which demonstrates the importance of the church to the community.

All the buildings on the square are integral and important components of an ecclesiastical group which demonstrates a changing sequence of architectural styles from the early 1850s to the second decade of the twentieth century.

Christ Church demonstrates outstanding craftsmanship in its triangular rose window, said to have been modelled on Lichfield Cathedral; its lofty chancel with richly coloured wall stencilling; its timber trussed ceiling; and its fine and varied collection of stained glass which includes examples of the work of leading stained glass firms and artists in Victoria in the nineteenth and early twentieth century: Ferguson & Urie, William Montgomery and Brooks Robinson.

The material used in the construction of the church is noteworthy as rarely used undressed random coursed sandstone from Point King, Sorrento.

The western rose window is of particular note for its unusual shape. The only other similar example known in Victoria is at St Georges Presbyterian Church, East St Kilda, designed by Purchas in 1877.

The organ is an important element of the church. Built in 1859 by the noted organ builder William Hill of London and enlarged in 1916 by Meadway and Slatterie, it is the earliest documented Hill organ to be exported to an Australian church.

[Source: Report to the Minister.]

Construction dates 1854,
Architect/Designer Purchas & Sawyer,
Heritage Act Categories Registered place,
Hermes Number 4542
Property Number

History

Associated People:

Extent of Registration

AMENDMENT OF REGISTER OF HISTORIC BUILDINGS

Under section 14 of the Historic Buildings Act 1981 the Governor in Council amends the Register by adding Historic Building No. 996.

Christ Church Complex
Acland Street, St Kilda.

(To the extent of:

1. All of the buildings known as the Christ Church complex, St Kilda being Christ Church @1), the Vicarage (B2), the Parish Hall (excluding the temporary prefabricated extension to the rear of the hall) (B3) and the Bishop's Residence (B4) (excluding all the outbuildings and the playground equipment on the site) shown on Plan 606818 endorsed by the Chairperson Historic Buildings Council and held by the Director, Historic Buildings Council.
2. All of the land contained in Register No. 1 page 11 and Register No. 2 page 7 of the Church of England Grants, being the land bounded by Acland Street, St Leonard's Avenue, Church Square and Eildon Road marked Li on Plan 606818 endorsed by the Chairperson, Historic Buildings Council and held by the Director, Historic Buildings Council).

Dated 30 November 1993

Responsible Minister:
ROBERT MACLELLAN
Minister for Planning

DAMIEN O'SHEA
Clerk of the Executive Council

[*Victorian Government Gazette* C48 9 December 1993 3287]

This place/object may be included in the Victorian Heritage Register pursuant to the Heritage Act 2017. Check the Victorian Heritage Database, selecting 'Heritage Victoria' as the place source.

For further details about Heritage Overlay places, contact the relevant local council or go to Planning Schemes Online <http://planningschemes.dpcd.vic.gov.au/>